


RL-140 S

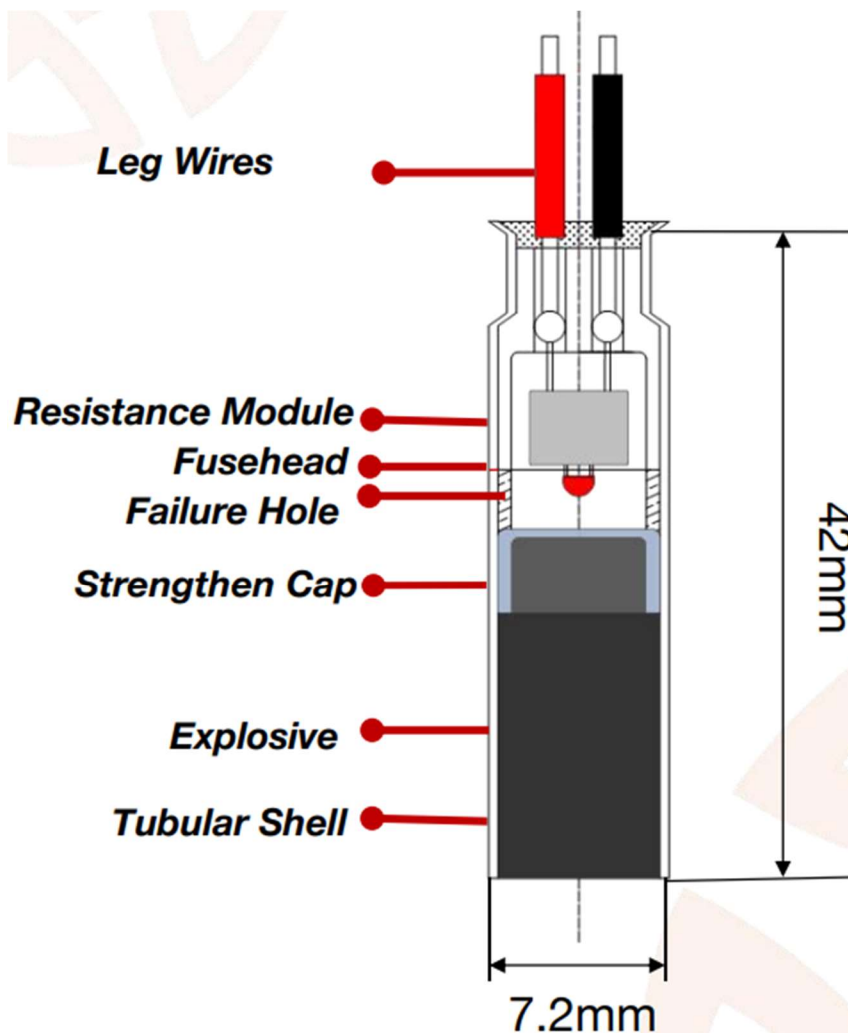

Technical Parameter

- Shell Length: 42mm;
- Base Charge: 0.325g, RDX;
- Full Resistance: $55.5 \pm 2\Omega$;
- Safety Current: 200mA, 5min, no fire;
- Full Firing Current: 800mA;
- Min. Firing Current: 500mA;
- Temperature Resistance: 150°C (300 F)/2h;
- Electrostatic Sensitivity Energy Value: 781mJ;
- Leg Wire: Modified tin-plating copper wire with Teflon coating. Leg wires are covered with insulation tube on the ends.